MedRx®
Precision Audiometric Instruments

www.medrx-usa.com

Precision Acoustics U4, 29 Enterprise Cres, Malaga WA 6090 ph (08) 9249 2707 www.precision-acoustics.com.au

PC-Based Screening Audiometer


AVANT AIR+

Welcome to the New Generation



Small Footprint
Approx. 5" x 5" x 1.25"

NEW Screening Audiometer

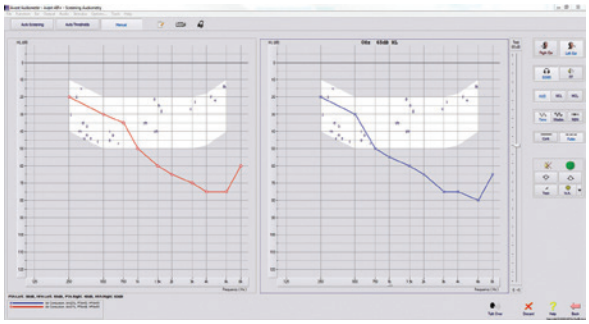

The AVANT AIR+ has air threshold capabilities allowing additional versatility. The small footprint makes it an ideal air audiometer for traveling. Use this product for community screenings where air thresholds are needed.

- Air Threshold Testing
- Automatic Air Audiometry Testing
- 125 Hz - 8 kHz
- Small Footprint - Approx. 5" x 5" x 1.25"
- PC Based via USB Connection
- NOAH™ Compatible

AVANT™ AIR+

MedRx, Inc
1200 Starkey Rd., Suite 105,
Largo, FL 33771
727-584-9600
Toll Free: 888-392-1234
Fax: 727-584-9602
Email: sales@medrx-usa.com
Web: www.medrx-usa.com

Welcome to the New Generation

Specifications

AVANT AIR+

About MedRx

MedRx, Inc. is a U.S. based global manufacturer and innovator of advanced computerized diagnostic and hearing instrument fitting technologies, specifically designed for the hearing care professional.

MedRx has created a remarkable New Generation of discreet, yet powerful PC-based instrumentation for Audiometry, Real Ear Measurement, Live Speech Mapping, Tinnitus Assessment, Hearing Instrument Testing & Evaluation and Video Otoscopy.

Standard Accessories

- DD65 Headphones
- Operator Mic / Monitor Headset
- Patient Response Switch
- Talkback Microphone
- USB Cable, Software & Manuals
- Carrying Case

Option


- Tinnitus Assessment Module

Minimum Computer Requirements

- Windows® PC compatible computer
- Intel™ i5 Dual Core, 2.0 GHz or better
- 4 GB RAM, 20 GB free hard drive space
- Available 2.0 USB ports
- Windows 7, 8 or 10 Professional (32 or 64-bit)

Technical Specifications

Standards:	Screening Audiometer as per ANSI S3.6-2010, IEC 60645-1:2012, Type 4; Tone Audiometry
Outputs:	DD65 Headphones
Frequency Range:	Air: 125 Hz – 8 kHz
Tinnometer Frequency Range:	Air: 125 Hz – 16 kHz (Optional)
Max Output:	Air Conduction: 100 dB HL For MidRange Frequencies,
Attenuation:	1 dB Step or 5 dB Step, User Selectable
Optional Accessories:	DD450 Headphones, DD45 Headphones & Insert Earphones
Compatible with:	NOAH™, TIMS® and SycleNet™
Power Requirements:	USB-powered
Dimensions:	Approx. 5" x 5" x 1.25" (L x W x H) Approx 12 cm x 12 cm x 3 c m (W x D x H)
Net Weight:	< 1 lbs • < 500 g
Standard Accessories:	DD65 Headphones, Patient Response Switch, Talkback Microphone, Operator Mic, Monitor Headset, Software & Manuals, Carrying Case

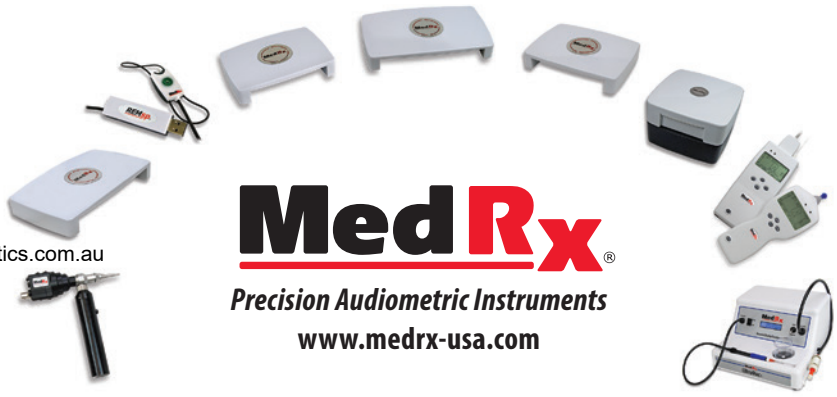

MedRx®
Precision Audiometric Instruments
www.medrx-usa.com

Precision Acoustics
Unit 4, 29 Enterprise Cres
Malaga WA 6090

ph (08) 9249 2707
mob 0427 19 117
em calibrations@precision-acoustics.com.au
www.precision-acoustics.com.au